

HEAT BUFFER

MODEL BR

CATALOG CARD




Electric heater
(optional)



Minimal heat loss
thanks to polyurethane insulation



Easy assembly
thanks to its small size

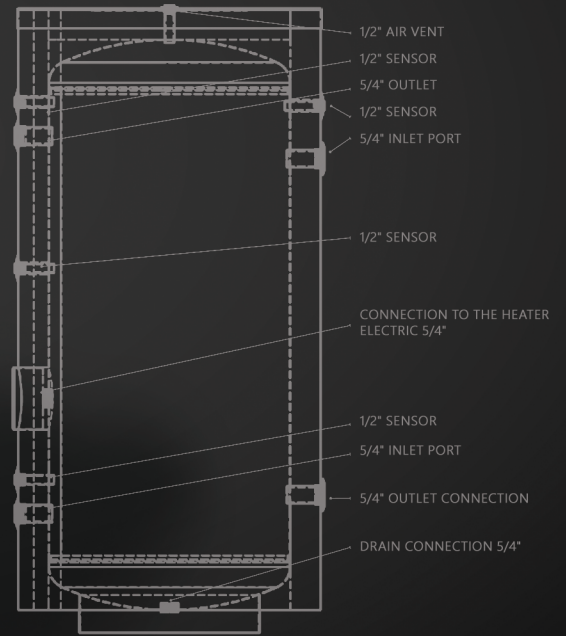

TECHNICAL SPECIFICATIONS

| | Buffer 50 | Buffer 100 | Buffer 200 | Buffer 250 | Buffer 500 | Buffer 1000 |
|---------------------|------------------------------|------------------------------|------------------------------|------------------------------|--|------------------------------|
| Product code | BR-005 | BR-01 | BR-02 | BR-025 | BR-05 | BR-10 |
| Height (mm) | 593 | 795 | 1245 | 1770 | 1653 | 2130 |
| Diameter (mm) | 445 | 542 | 542 | 542 | 750/807 | 1010 |
| net weight (kg) | 35 | 50 | 60 | 70 | 90 | 160 |
| Capacity (lt) | 50 | 100 | 170 | 245 | 454 | 1030 |
| Insulation | 50 mm / 18 kg/m ³ | 50 mm / 40 kg/m ³ | 50 mm / 40 kg/m ³ | 50 mm / 40 kg/m ³ | 50 mm / 40 kg/m ³ 80 mm / 18 kg/m ³ | 80 mm / 14 kg/m ³ |
| Insulation material | Polyurethane | Polyurethane | Polyurethane | Polyurethane | Foam rubber | Foam rubber |
| Outer material tank | Powder coated Steel ST 37 | Powder coated Steel ST 37 | Powder coated Steel ST 37 | Powder coated Steel ST 37 | Leather | Leather |
| Tank material | HRP 6222/3mm steel | HRP 6222/3mm steel | HRP 6222/3mm steel | HRP 6222/3mm steel | HRP 6222/3mm steel | HRP 6222/3mm steel |
| Energy class | A | A | B | B | B | B |